
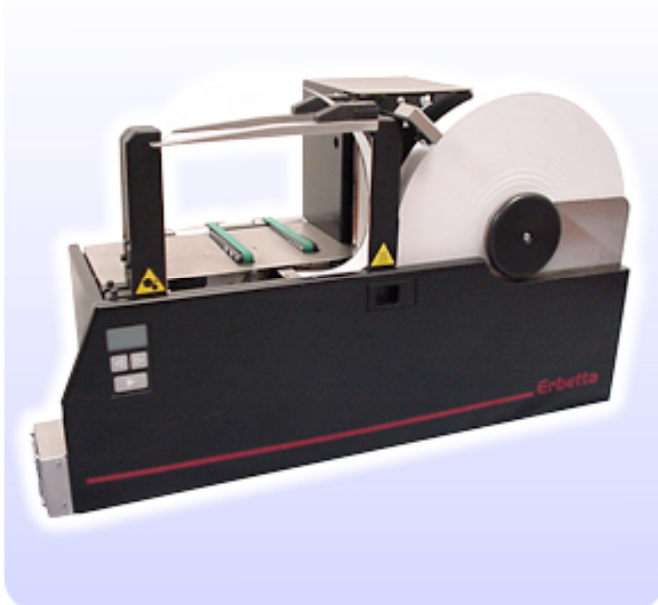


LR Bander

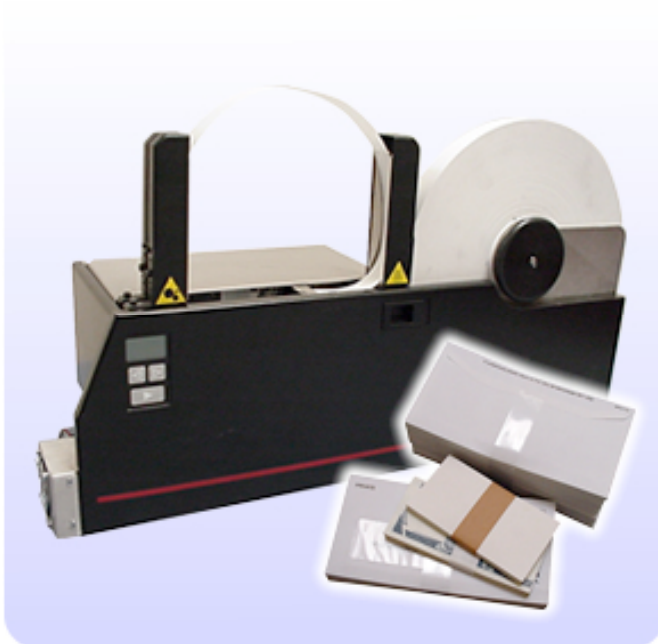

Whether manually fed or integrated into automated environments, the LR Bander provides no nonsense heatseal banding.

A unique design based on proven heatseal technology, but allied to modern control techniques and including options for pack clamping and a haul-off track. All this provides unrivalled flexibility.

Typical uses are for banding stationery or other printed matter, mail, currency and the like.

LR Bander features

- For use in manually fed and automated environments
- For banding products up to 230mm wide
- Clean cut overlap joint
- Paper and clear plastic tape options
- Adjustable for tape widths from 24mm to 44mm
- Table-top; yet has integral large capacity tape reel
- Open arch design
- Pack clamping and haul-off track options
- 36-42 VDC or Universal AC input 90-240 VAC, 40-60Hz. 150W Max
- Can be fully controlled via an RS485 interface for system integration. CANBUS interface is also an option
- Fully UK supported